


WRAP METALLIC MARKER TAPE AROUND SERVICE MARKER BOARD. 4 WRAPS MINIMUM. RUN UP BOARD TO SURFACE. MIN 4 WRAPS AT TOP ALSO.

INSTALL BURIED METALLIC MARKER TAPE 3' ABOVE PIPE. TAPE SHOULD READ "CAUTION BURIED SEWER BELOW". CARLTON IND., BLACKBURN MFG. CO. OR EQUAL.

6" SEWER LATERAL SHALL BE THE SAME MATERIAL AS THE MAIN LINE (PVC, EPOXY LINED D.I., C900 OR HDPE)

6" TEE ON SEWER MAIN

SEWER MAIN

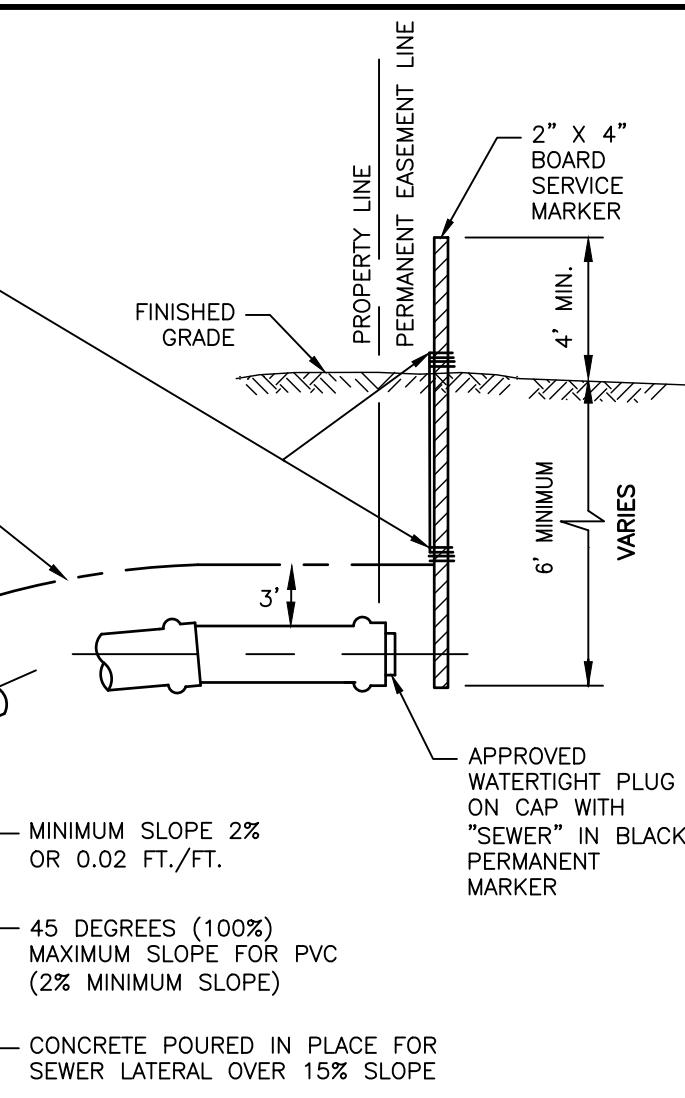

#### NOTES:

1. 2" X 4" BOARD – LENGTH AS REQUIRED IN EVEN FOOT INCREMENTS. PAINT TOP 4' ABOVE GROUND WITH WHITE PAINT. STENCIL IN BLOCK LETTERS THE WORD "SEWER" & TOTAL LENGTH OF THE 2" X 4" BOARD. LETTERING TO BE 3" IN HEIGHT. TOP OF 2" X 4" SHALL BE 4' ABOVE GROUND LEVEL.
2. FOR DUCTILE IRON PIPE IN RIGHT-OF-WAY & EASEMENTS, USE RESTRAINING DEVICE AS SPECIFIED BY THE DISTRICT.
3. PROVIDE DISTANCE IN FEET FROM TEE TO DOWNSTREAM MANHOLE TO THE DISTRICT.