


LIST OF ACCEPTABLE FIRE HYDRANTS:  
 EAST JORDAN WATERMASTER 5CD250 WITH 4" STORZ  
 AMERICAN DARLING B62B HIGH PRESSURE  
 MUELLER SUPER CENTURION 250

FIRE HYDRANT 5 1/4" MAIN VALVE OPENING  
 1- 4 1/2" PUMPER CONNECTION (NST) WITH 4" STORZ ADAPTER  
 2- 2 1/2" HOSE CONNECTION (NST)  
 1- 6" MECHANICAL JOINT INLET WITH LUGS  
 1- 1 1/4" PENTAGON OPERATING NUT OPENING COUNTERCLOCKWISE.  
 PAINT HYDRANT WITH TWO COATS OF RUST-OLEUM  
 HIGH-PERFORMANCE PROTECTIVE ENAMEL 7543  
 "SAFETY YELLOW"

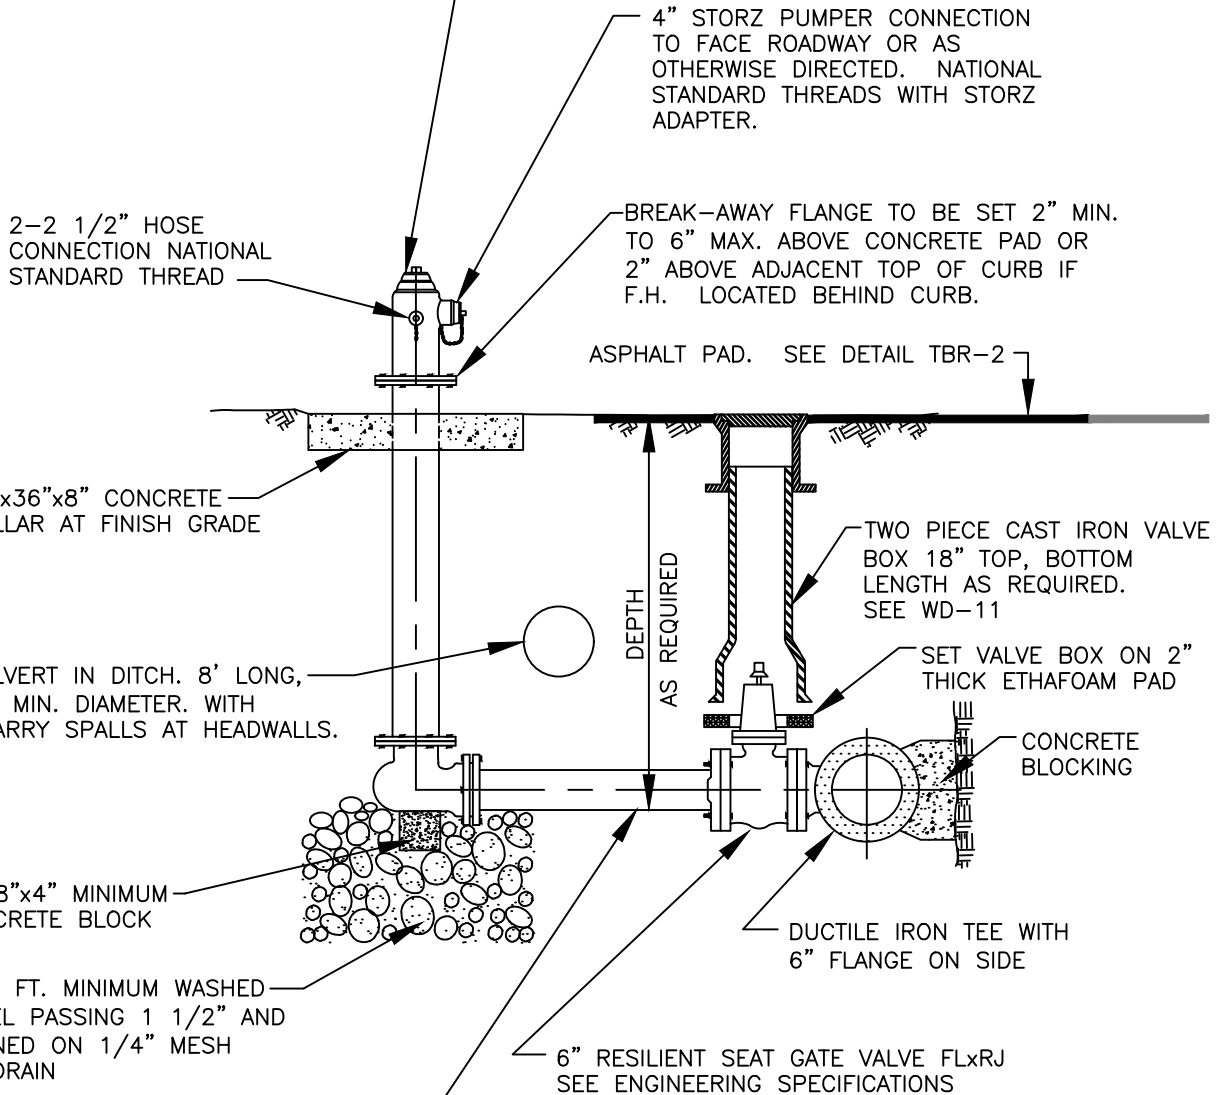

6" DUCTILE IRON CLASS 52 PIPE  
 WITH POLY WRAP AND RESTRAINED  
 JOINTS ENTIRE LENGTH, INCLUDING  
 VALVE AND HYDRANT BEND.

NOTE:  
 HYDRANTS NOT IN SERVICE SHALL BE  
 COVERED WITH BLACK HEAVY DUTY  
 LAWN AND GARDEN BAG, SECURE WITH  
 DUCT TAPE OR ELECTRICAL TAPE

CROSS VALLEY WATER DISTRICT  
 STANDARD WATER DETAILS

FIRE HYDRANT ASSEMBLY

WD-7

NOT TO SCALE

APR 2024