



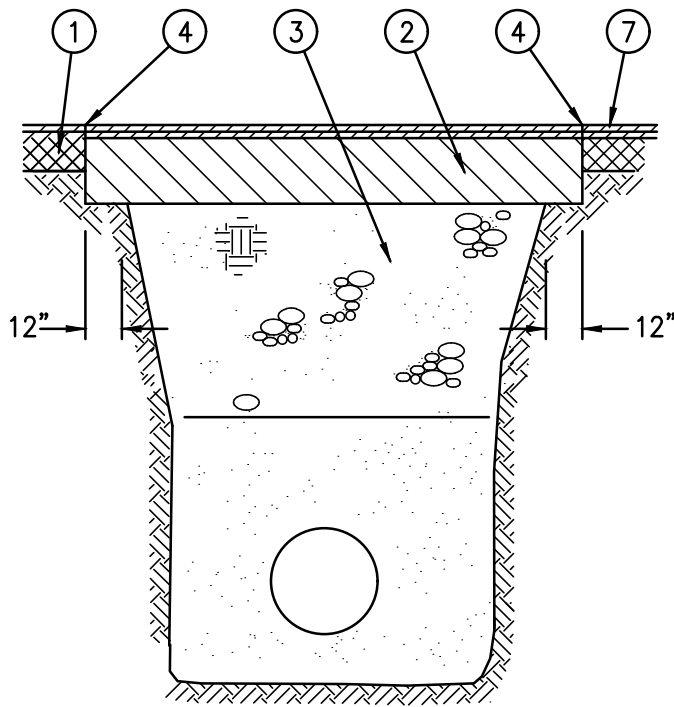

ACP RESTORATION

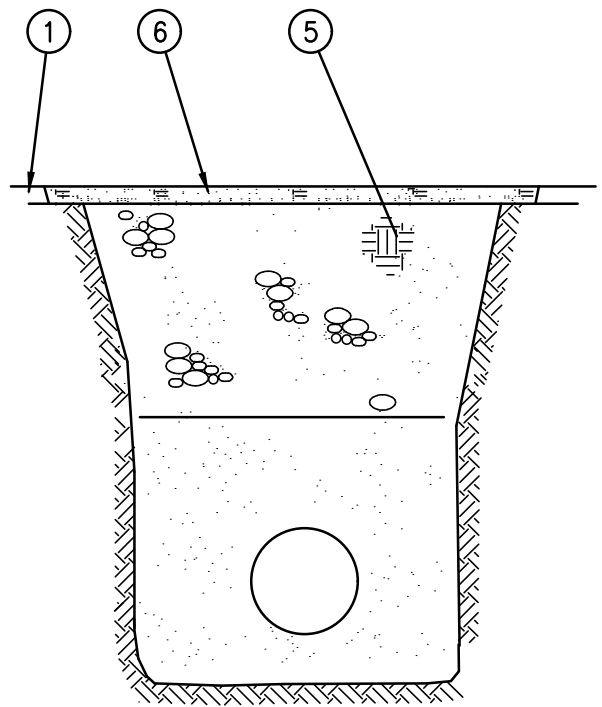

UNPAVED SHOULDER
AND PRIVATE EASEMENT

- ① EXISTING SURFACE
- ② LONGITUDINAL TRENCH – 6" HMA CLASS 1/2" OR 2" HMA CLASS 1/2" + 4" HMA CLASS 1"
TRANSVERSE TRENCH – 8" HMA CLASS 1/2" OR 2" HMA CLASS 1/2" + 6" HMA CLASS 1"
- ③ TRENCH BACKFILL OR CONTROL DENSITY FILL
PER LOCAL JURISDICTIONAL REQUIREMENTS.
- ④ NEAT LINE ACP CUT. TACK EDGES WITH AR
4000 ASPHALT CEMENT. SEAL EDGES WITH
AR 4000 ASPHALT CEMENT.
- ⑤ TRENCH BACKFILL.
- ⑥ RESTORE EXISTING SURFACE. TOP SOIL, CSTC
(2" MINIMUM) OR AS NOTED ON PLANS.
- ⑦ 2" HMA CLASS 1/2" OVERLAY WHEN SPECIFIED ON
PLANS OR REQUIRED BY THE JURISDICTIONAL
AUTHORITY.

HMA= HOT MIX ASPHALT
AR= ASPHALT RUBBER
CSTC= CRUSHED SURFACE TOP COURSE
ACP= ASPHALT CONCRETE PAVEMENT

NOTES:

- 1. RESTORATION TO BE EXISTING CONDITION OR BETTER.
- 2. ALL WORK TO COMPLY WITH SNOHOMISH COUNTY REQUIREMENTS.
- 3. IF PERMEABLE SURFACE IS REQUIRED, INSTALL OR REPLACE IN KIND
ACCORDING TO JURISDICTIONAL REQUIREMENTS.

FILE NAME: \\K-FS1\LIBRARY\CAD\DETAILS\DISTRICTS\CROSS VALLEY WATER DISTRICT\TBR-2.DWG

**CROSS VALLEY WATER DISTRICT
TRENCH BACKFILL AND RESTORATION**

TRENCH SURFACE RESTORATION

TBR-2

NOT TO SCALE

FEB 2022